



Lindy 15m USB 3.2 Gen 2 & DP 1.4 Type C Hybrid Cable

Brand : Lindy

Product code: 43399

Product name : 15m USB 3.2 Gen 2 & DP 1.4 Type C Hybrid Cable

USB C - USB C, M/M, USB 3.2 Gen, DP 1.4, PD 60W, 15 m


[Lindy 15m USB 3.2 Gen 2 & DP 1.4 Type C Hybrid Cable:](#)

The Lindy USB 3.2 Gen 1 & DP 1.4 Type C Hybrid Cable is a unique solution, which uses optical fiber as high-speed transmission medium to perfectly transmit USB 3.2 as well as DP 1.4 data over a distance of 8m. It combines data, video and USB Power Delivery into a single, high performance cable which makes it a great solution for use in modern meeting rooms and classrooms when connecting LFDs and touchpanels. A more flexible construction makes this cable simple to install, with increased resistance to RFI/EMI ensures that the cable can be installed in sensitive environments.

The cable also supports Power Delivery up to 60W (20V / 3A). Compatible with USB 3.2 Type C and Thunderbolt 3/4 equipped computers, this is a perfect extension tool for the latest laptops, Macbooks and Type C computers. With plug and play functionality, this extension cable can be installed quickly and with minimum fuss,



Features		Power	
USB version *	USB 3.2 Gen 1 (3.1 Gen 1)	Output voltage	20 V
Connector 1 *	USB C	Output current (max)	3 A
Connector 2 *	USB C	Weight & dimensions	
Connector 1 gender *	Male	Cable length *	15 m
Connector 2 gender *	Male	Cable diameter	6.5 mm
Connector 1 form factor	Straight	Weight	610 g
Connector 2 form factor	Straight	Bend radius (min)	10 cm
AWG wire size	21	Packaging data	
Cable jacket material	Polyvinyl chloride (PVC)	Package type	Box
Connector shielding	✓	Package width	240 mm
Connector shield material	Copper	Package depth	240 mm
Connector housing material	Plastic	Package height	65 mm
Maximum data transfer rate	5000 Mbit/s	Package weight	770 g
Maximum data transfer rate	5 Gbit/s	Packaging content	
Product colour *	Black	Quantity per pack *	1 pc(s)
USB Power Delivery	✓	Manual	✓
USB Power Delivery up to	60 W	Sustainability	
USB Type-C DisplayPort Alternate Mode	✓	Sustainability compliance	✓
DisplayPort version	1.4	Operational conditions	
Maximum resolution	3840 x 2160 pixels	Operating temperature (T-T)	-10 - 70 °C
Nominal attenuation	<10dB/km@850nm, <8dB/km@1300nm	Storage temperature (T-T)	-40 - 85 °C
		Other features	
		Compliance certificates	CE, Federal Communications Commission (FCC), REACH, RoHS, UKCA

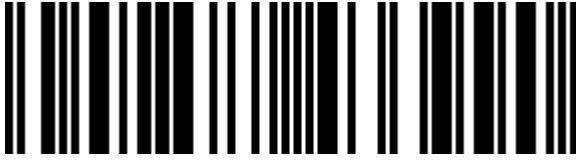

4002888433990

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 30-OCT-2024. Prints or copies of Information are only valid on the printed Publication date