

Philips 86BDL4511D/00 Signage Display Digital A-board 2.18 m (86") 500 cd/m² 4K Ultra HD Black 24/7

Brand : Philips

Product code: 86BDL4511D/00

Product name : 86BDL4511D/00


86" 4K UHD 3840 x 2160 IPS, 500 cd/m², 16:9, Response 8ms, 1.07 Billion, 1200:1, USB, HDMI, DVI-I, RJ-45, RS232C, OPS

Philips 86BDL4511D/00. Product design: Digital A-board. Display diagonal: 2.18 m (86"), Display resolution: 3840 x 2160 pixels, Display brightness: 500 cd/m², HD type: 4K Ultra HD. Operating hours (hours/days): 24/7. Product colour: Black



Display		Design	
Panel type	IPS	VESA mounting *	✓
Display diagonal *	2.18 m (86")	Panel mounting interface	400 x 400 mm
Display resolution *	3840 x 2160 pixels	Bezel width (bottom)	1.55 cm
Display brightness *	500 cd/m ²	Bezel width (side)	1.55 cm
HD type *	4K Ultra HD	Bezel width (top)	1.55 cm
Touchscreen *	✗	Performance	
Native aspect ratio	16:9	Purpose *	Commercial
Response time	8 ms	On Screen Display (OSD)	✓
Contrast ratio (typical)	1200:1	On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, Danish, Dutch, English, Finnish, French, Italian, Japanese, Norwegian, Polish, Portuguese, Russian, Swedish, Turkish
Contrast ratio (dynamic)	500000:1		Operating hours (hours/days)
Viewing angle, horizontal	178°	Power	
Viewing angle, vertical	178°	Power consumption (typical) *	355 W
Display number of colours	1.07 billion colours	Power consumption (standby) *	0.5 W
Pixel pitch	0.4935 x 0.4935 mm	Energy efficiency class (SDR)	G
Display diagonal (metric)	217.4 cm	Energy consumption (SDR) per 1000 hours	351 kWh
Panel life	50000 h	AC input voltage	100 - 240 V
Haze rate	3%	AC input frequency	50 - 60 Hz
Ports & interfaces		Energy efficiency scale	A to G
HDMI ports quantity *	3	Computer system	
HDMI version	2.0	Video formats supported	H.263, H.264, H.265, MPEG
HDMI input ports quantity	3	Audio formats supported	AAC, HE-AAC
DVI port *	✓	Image formats supported	BMP, JPEG, PNG
DVI-I ports quantity	1		
DisplayPorts quantity *	2		
DisplayPorts in	1		
DisplayPorts out	1		
USB port *	✓		
USB ports quantity	2		
USB version	2.0		

Ports & interfaces		Weight & dimensions	
Audio (L/R) in	1	Display width	1929 mm
Audio (L/R) out	1	Display depth	69.5 mm
RS-232C	✓	Display height	1100 mm
Remote (IR) input	1	Display weight	50.2 kg
Remote (IR) output	1	Packaging content	
OPS module slot	✓	Cables included	AC, IR sensor, RS-232, USB
Audio		Operational conditions	
Built-in speaker(s) *	✓	Operating temperature (T-T)	0 - 40 °C
Number of built-in speakers	2	Operating relative humidity (H-H)	20 - 80%
RMS rated power	20 W	Storage temperature (T-T)	-20 - 60 °C
Design		Storage relative humidity (H-H)	5 - 95%
Product design *	Digital A-board	Logistics data	
Placement supported *	Indoor	Harmonized System (HS) code	85285210
Product colour *	Black	Technical details	
		Compliance certificates	RoHS

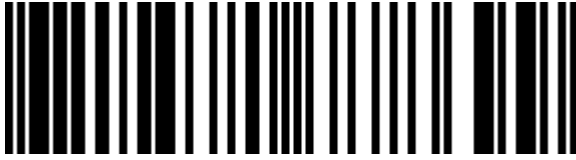

8712581778699

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 11-NOV-2024. Prints or copies of Information are only valid on the printed Publication date