


AXIS T90D20

High-performance illuminator with ease of installation

Based on the latest LED technology, the new generation of Axis illuminators delivers more light where it is needed. They generate longer illumination distances, minimize light wastage, and prevent overexposure of foreground objects. With interchangeable lenses, the angle of illumination can be optimized to match your network camera's field of view. AXIS T90D20 IR-LED Illuminators come with a AC/DC or PoE power input, for easy and flexible installation with PoE midspans or PoE switches. Thanks to integrated green features such as power adjust and telemetry control (on AC/DC model only), Axis illuminators enhance the potential for energy savings.

- > **Low power consumption**
- > **Flexible angle of illumination**
- > **Easy setup by remote control**
- > **Choice of AC/DC or PoE power input**
- > **Various mounting options**

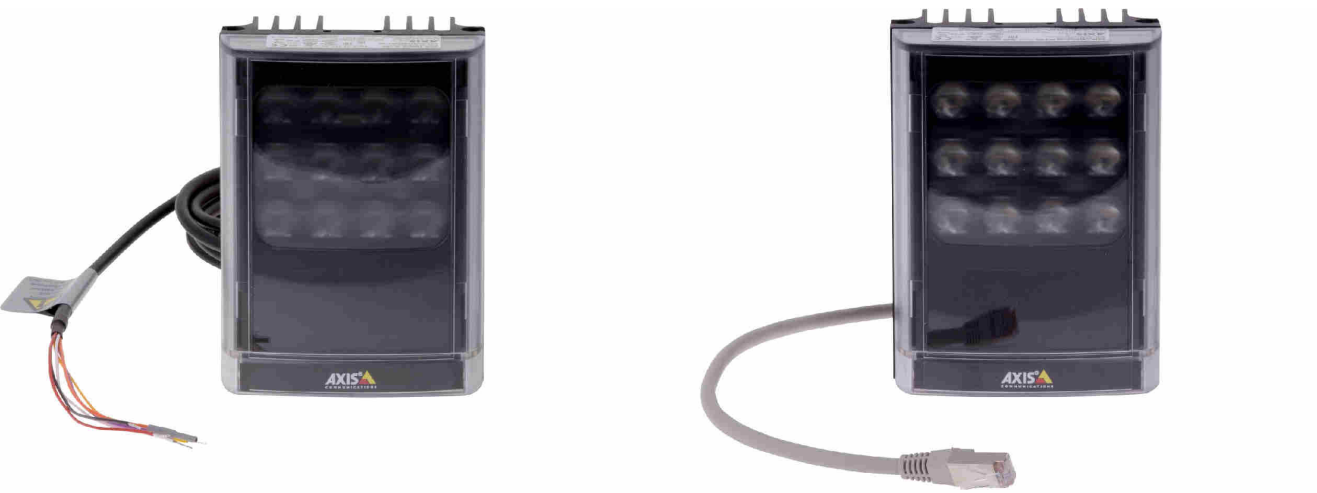

AXIS T90D20

Models	AXIS T90D20 IR-LED Illuminator, AC/DC variant AXIS T90D20 IR-LED Illuminator, PoE variant	Approvals	EMC FCC Part 15.107 and 15.109 Class B, ICES-003 Issue 6 Class B, EN 55032 Class B, RCM AS/NZS CISPR 32 Class B, VCCI Class B, EN 55015, EN 55024, EN 50130-4, EN 61547 EMC AC/DC variant KCC KN15, KN 61547 Safety IEC/EN 60598-1, IEC/EN 62471 (risk group 2), C22.2 No 250.0-08, UL 2108 Environment IEC/EN 60529 IP66, IEC/EN 62262 IK09
General		Dimensions	100 x 135 x 66 mm (4 x 5 x 2.5 in) Cable length: 2.5 m (8.2 ft)
Compatible products	All Axis cameras with infrared-cut filter	Weight	950 g (2.11 lb)
Distance	With standard lens 10° x 10°: 144 m (472 ft) With diverging lens 35° x 10°: 78 m (256 ft) With diverging lens 60° x 25°: 54 m (177 ft) With diverging lens 80° x 30°: 36 m (118 ft) With optional diverging lens 120° x 50°: 24 m (79 ft)	Included accessories	Three diverging lenses with different beam angles: 35°, 60° and 80° IP66 cable coupler (for PoE variant only)
Power	AC/DC variant Power input: 12–24 V AC/DC AC frequency: 50–60 Hz Maximum light: 18 W Standby mode: 0.3 W PoE variant Power over Ethernet (PoE) IEEE 802.3at Type 2 Class 4 Maximum light: 20 W Standby mode: 2.2 W	Optional accessories	AXIS T90B Remote Control AXIS IR Diverging Lens B 120° AXIS T90 Wall-and-Pole Mount AXIS T90 Single Bracket AXIS T90 Multi Bracket AXIS T8123–E Outdoor Midspan 30 W 1–port AXIS T8133 Midspan 30 W 1–port AXIS T81B22 DC 30 W Midspan 1–port AXIS T8134 60 W Midspan AXIS T8124–E Outdoor Midspan 60 W 1–port AXIS T8125 AC 24 V Midspan 60 W 1–port AXIS T8144 60 W Industrial Midspan AXIS T8508 PoE+ Network Switch AXIS T8516 PoE+ Network Switch AXIS T8524 PoE+ Network Switch AXIS T8504–E Outdoor PoE Network Switch Mains adaptor PS-24 Power Supply PS24 240 W For more accessories, see www.axis.com
Control technology	AC/DC variant Through integrated push buttons or remote control: power level, photocell sensitivity, telemetry link for remote activation, timer PoE variant Through integrated push buttons or remote control: power level, photocell sensitivity, timer	Warranty	5-year warranty, see axis.com/warranty
Type	850 nm semi-covert	a. 120° diverging lenses as optional accessory	
Angle	Without diverging lenses: 10° With diverging lenses: 35°, 60°, 80°, 120° ^a	Environmental responsibility: axis.com/environmental-responsibility	
Casing	Aluminum and polycarbonate Color: black		
Display and indicators	Indicator LEDs		
Environment	Indoor and outdoor		
Mounting	Wall, ceiling, pole, fixed box camera housing		
Operating conditions	-50 °C to 50 °C (-58 °F to 122 °F) Humidity 10–100% RH (condensing)		
Storage conditions	-50 °C to 70 °C (-58 °F to 158 °F)		