



Lindy 5m USB 2.0 Type A to B Cable, Anthra Line

Brand : Lindy

Product code: 36675

Product name : 5m USB 2.0 Type A to B Cable, Anthra Line

5m USB 2.0 Type A to B Cable, Anthra Line

[Lindy 5m USB 2.0 Type A to B Cable, Anthra Line:](#)


From the Lines cable connectivity concept developed by Lindy, Anthra Line USB 2.0 Type A to B cables are the professional choice for high performance connections in commercial AV and IT installations.

Anthra Line USB 2.0 cables are premium connections that feature double shielded construction with copper conductors for performance and corrosion resistance. High quality gold plated contacts and connectors maintain optimal signal integrity and maximum reliability.

Data transfer speeds up to 480Mbps are supported for the quick and effortless transfer of large data volumes.

Anthra Line USB 2.0 Type A to B cables are available in lengths from 0.2m to 10m.

Lindy 5m USB 2.0 Type A to B Cable, Anthra Line. Cable length: 5 m. Connector 1: USB A, Connector 2: USB B, USB version: USB 2.0, Maximum data transfer rate: 0.48 Gbit/s, Connector contacts plating: Gold, Product colour: Black

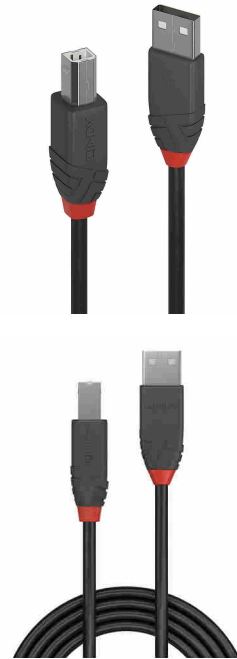

| Features | | Features | |
|----------------------------|--------------------------|--------------------------------|---------------------|
| USB version * | USB 2.0 | Cable type | Round cable |
| Connector 1 * | USB A | Nominal attenuation | 5.8db/km |
| Connector 2 * | USB B | Certification | RoHS, REACH, UL |
| Connector 1 gender * | Male | Weight & dimensions | |
| Connector 2 gender * | Male | Cable length * | 5 m |
| Connector 1 form factor | Straight | Cable diameter | 4.4 mm |
| Connector 2 form factor | Straight | Bend radius (min) | 1.6 cm |
| AWG wire size | 26/28 | Connector 1 dimensions (WxDxH) | 15.5 x 35 x 7.8 mm |
| Connector material | Nickel | Connector 2 dimensions (WxDxH) | 11.8 x 35 x 10.2 mm |
| Contact material | Copper | Packaging data | |
| Connector contacts plating | Gold | Package type | Polybag |
| Cable jacket material | Polyvinyl chloride (PVC) | Packaging content | |
| Conductor material | Tinned copper | Quantity per pack * | 1 pc(s) |
| Connector shielding | ✓ | Operational conditions | |
| Connector shield material | Aluminium | Operating temperature (T-T) | 0 - 60 °C |
| Connector housing material | Polyvinyl chloride (PVC) | Storage temperature (T-T) | 0 - 60 °C |
| Maximum data transfer rate | 480 Mbit/s | Logistics data | |
| Maximum data transfer rate | 0.48 Gbit/s | Harmonized System (HS) code | 84733080 |
| Product colour * | Black | | |



4002888366755

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 14-NOV-2024. Prints or copies of Information are only valid on the printed Publication date