



PoE12-30W / PoE12-60W

2.5G PoE+ Injector / 5G PoE++ Injector

As demands for connection from networking devices such as IP phones, IP cameras and access points increase, deployment complexity and cost rise as well. For less cable usage and investment, Power over Ethernet (PoE) technology provides both data connection and electrical power to devices through just one cable without power-socket restriction. Featured with the benefits of PoE technology, Zyxel's PoE Injectors, PoE12-30W and PoE12-60W, all provide super-fast LAN connectivity with high-power budget; easily connect to PoE devices over Cat 5e or above cable. PoE12-30W and PoE12-60W support PoE+ and PoE++ standards respectively, both ensure interoperability with other standard-based PoE-capable devices.

Benefits

Higher network speed boosts network performance

PoE12-30W and PoE12-60W are here to meet the increasing demand of connection for high-speed networking devices such as WiFi 6 AP, surveillance PTZ camera or advanced POS terminals. PoE12-30W is equipped with 100M/1G/2.5G RJ-45 ports providing network speeds of up to 2.5 Gbps, and PoE12-60W is equipped with 1G/2.5G/5G RJ-45 ports providing network speeds of up to 5 Gbps. Both models can connect Multi-Gigabit devices using existing Cat 5e cable without extra re-cabling cost.



PoE12-30W:
2.5G data / PoE+ ports
PoE12-60W:
5G data / PoE++ ports



PoE12-30W:
30 W power budget
PoE12-60W:
60 W power budget



PoE12-30W:
Complies with IEEE 802.3at
PoE+ standard
PoE12-60W:
Complies with IEEE 802.3bt
PoE++ 60 W standard



Easy plug-and-play desktop
or wall-mounted installation



Overloading and short-circuit
protection

Larger power budget powers more PD devices

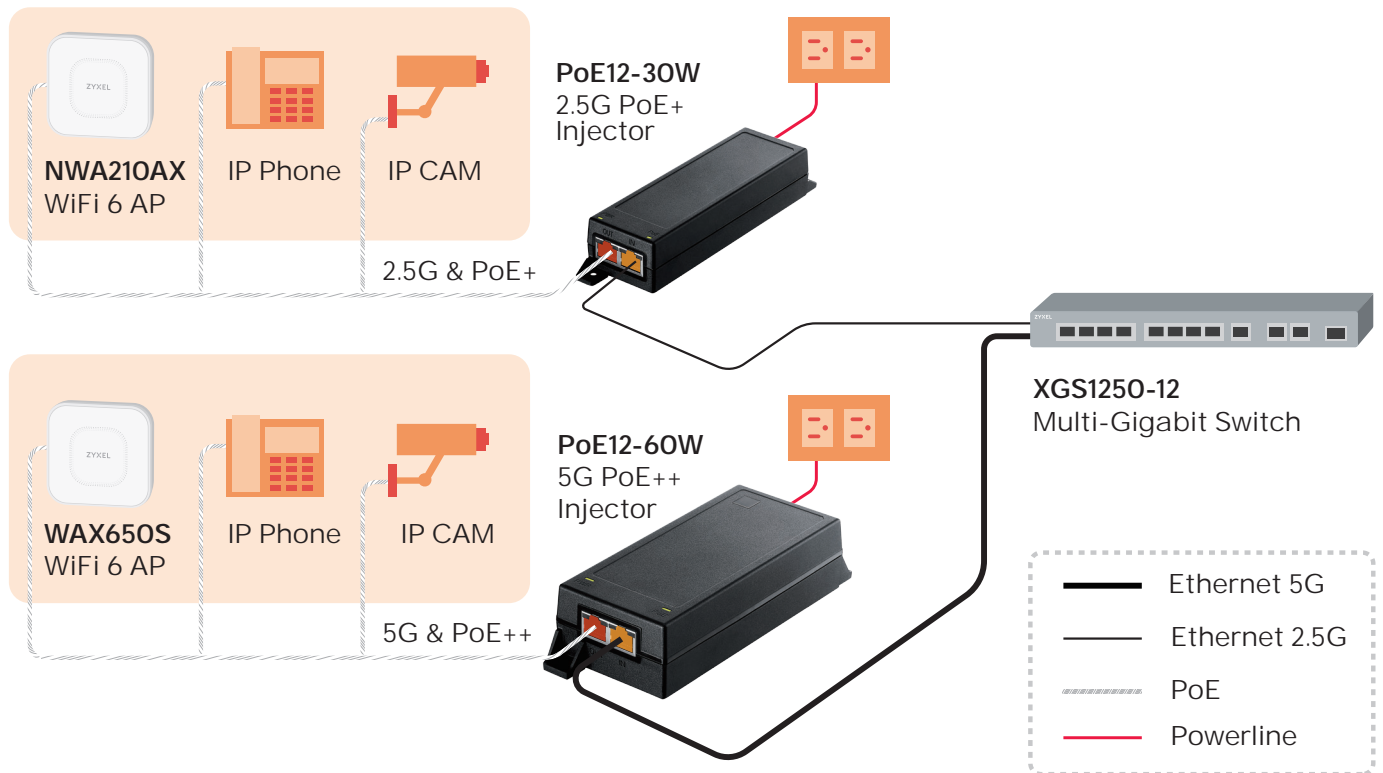
PoE12-30W complies with IEEE 802.3at PoE+ standard and PoE12-60W complies with IEEE 802.3bt PoE++ standard to provide PoE power budget up to 30 W and 60 W, respectively. Both models ensure interoperability and compatibility with other standard-based PoE-capable devices. They ease the installation for wireless LAN expansion by offering an alternative to external DC power to Access Points while the network only deployed non-PoE Ethernet Switches.

Easy to use with robust protection



Installation is incredibly easy, simply connect the Injector to an Ethernet Switch and to the designated PoE device to provide proper power and data traffic for the entire network. The compact and lightweight design is easy to install and facilitates deployment of PoE devices where power outlets are not available.

Both PoE Injectors have overload and short circuit protection, which shuts down the power immediately if those issues prevail, leaving no damage to your equipment.

Application Diagram



Specifications

Model	PoE12-30W	PoE12-60W	
Product name	2.5G PoE+ Injector	5G PoE++ Injector	
			
Port Density			
Total port count	2	2	
100/1000/2500 Mbps (Data)	1	-	
100/1000/2500 Mbps (Power/Data)	1	-	
100/1000/2500/5000 Mbps (Data)	-	1	
100/1000/2500/5000 Mbps (Power/Data)	-	1	
PoE			
Total PoE budget (watts)	30	60	
PoE Standard	802.3at PoE+	802.3bt PoE++	
Ethernet Standard	<ul style="list-style-type: none"> • IEEE 802.3u 100BASEX Ethernet • IEEE 802.3ab 1000BASE-T • IEEE 802.3bz 2.5GBASE-T 	<ul style="list-style-type: none"> • IEEE 802.3u 100BASEX Ethernet • IEEE 802.3ab 1000BASE-T • IEEE 802.3bz 2.5G/5GBASE-T 	
Power			
Input	100 - 240 V 1.0 A, 50/60 Hz	100 - 240 V 2.0 A, 50/60 Hz	
Max. power consumption (without PD, watts)	0.07	0.126	
Physical Specifications			
Item	Dimensions (WxDxH)(mm/in.)	140 x 45.5 x 30/5.51 x 1.79 x 1.18	140 x 65 x 38.5/5.51 x 2.56 x 1.52
	Weight (g/lb.)	144/0.32	278/0.61
Packing	Dimensions (WxDxH)(mm/in.)	171 x 121 x 42/6.73 x 4.76 x 1.65	168 x 142 x 47/6.61 x 5.59 x 1.85
	Weight (g/lb.)	918/2.02	1120/2.47
Included accessories	Power cord	Power cord	
ESD/Surge Protections			
ESD (air/contact)	8 KV/6 KV	8 KV/6 KV	
Surge	+/- 4 KV	+/- 6 KV	
Environmental Specifications			
Operating	Temperature	-10°C to 45°C/14°F to 113°F	-10°C to 40°C/14°F to 104°F
	Humidity	5% to 90% (non-condensing)	5% to 90% (non-condensing)
Storage	Temperature	-25°C to 70°C/-13°F to 158°F	-25°C to 65°C/-13°F to 149°F
	Humidity	5% to 90% (non-condensing)	5% to 90% (non-condensing)
MTBF (hr)	1,869,569	1,892,473	
Heat dissipation (BTU/hr)	119.08	254.88	

For more product information, visit us on the web at www.zyxel.com

Copyright © 2022 Zyxel and/or its affiliates. All rights reserved.
All specifications are subject to change without notice.



16/11/22